



1.SBR Rubber Sheet

Color	Black,Green,Red, White, Grey, Blue		
Size	1~100mm thick	0.1~2m width	1~30m length
Hardness	55+/-5 ShoreA, 65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min. 2MPA, Min. 150%		
Temperature range	-30°C to 100 °C		
Surface	Smooth or cloth wave		



2.CR/Neoprene Rubber Sheet

Color	Black, Red, White, Green, Blue		
Size	1~100mm thick	0.1~2m width	1~30m length
Hardness	55+/-5 ShoreA, 65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min. 3MPA, Min. 200%		
Temperature range	-30°C to 130 °C		
Surface	Smooth or cloth wave		



3.NBR/Nitrile Rubber Sheet

Color	Black, Red, White, Green, Blue		
Size	1~100mm thick	0.1~2m width	1~30m length
Hardness	55+/-5 ShoreA, 65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min. 3MPA, Min. 200%		
Temperature range	-30°C to 130 °C		
Surface	Smooth or cloth wave		



4.EPDM Rubber Sheet

Color	Black, Red, White, Grey, Green, Blue		
Size	1~100mm thick	0.1~2m width	1~30m length
Hardness	55+/-5 ShoreA, 65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min. 3MPA, Min. 200%		
Temperature range	-30°C to 100 °C		
Surface	Smooth or cloth wave		



5.Silicone Rubber Sheet

Color	Red, Transparent, white		
Size	0.5~30mm	1~2m width	1~20m length
Hardness	40+/-5 ShoreA, 50+/-5 ShoreA, 60+/-5 ShoreA		
Tensile Strength /Elongation	Min. 6MPA, Min. 300%		
Temperature range	-50°C to 250 °C		
Surface	Smooth		



6.FKM Rubber Sheet

Color	Black, Red, White, Green, Blue		
Size	1~50mm thick	0.5m~2m	1~30m length
Hardness	55+/-5 ShoreA, 65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min.6MPA, Min. 400%, density:2+/-0.5g/cm3		
Temperature range	-20°C to 250 °C		
Surface	Smooth		



7.NR Rubber Sheet

Color	Black, Red, White, Grey		
Size	1~50mm thick	0.6~2m width	1~30m length
Hardness	40+/-5 ShoreA, 50+/-5 ShoreA, 65+/-5 ShoreA		
Tensile Strength /Elongation	Min. 10MPA to 24MPA		
Temperature range	-20°C to 250 °C		
Surface	Smooth		

8.Insertion Rubber Sheet



Color	Black, Red, White		
Size	1.5~100mm	1~2m width	1~30m length
Hardness	65+/-5 ShoreA, 75+/-5 ShoreA		
Tensile Strength /Elongation	Min. 2.5MPA, Min. 150%		
Temperature range	-30°C to 100 °C		
Surface	Smooth or cloth wave		



9.Sponge Rubber Sheet

Color	Black, red		
Size	thickness	width	length
	1~ 50mm	1m	2m/10m
Material	Neoprene,EPDM,silicone, PE,EVA		
Hardness	25+/-5 ShoreC		
Surface	Open-cell, Close-cell		



9. Hypalon Rubber Sheet

Color	Black, Red, White, Green, Blue		
Size	1~50mm thick	0.5m~2m	1~30m length
Hardness	60-80shoreA		
Tensile Strength /Elongation	6mpa-15mpa, 1.35g/cm3-1.5g/cm3		
Temperature range	-60°C to 135 °C		
Surface	Smooth		



10. Butyl Rubber Sheet


Color	Black, Red, White, Green, Blue		
Size	2~6mm thick	1m~1.4m	1~20m length
Hardness	50-65shoreA		
Tensile Strength /Elongation	>=6mpa, >=350%		
Temperature range	-40°C to 130 °C		
Surface	Smooth		

11. Insulating rubber sheet



Grade	Working voltage	Testing voltage	Breakthrough voltage
Class 0	1000v	5000v	10000v
Class 1	7500v	10000v	20000v
Class 2	17000v	20000v	30000v
Class 3	26500v	30000v	40000v
Class 4	36000v	40000v	50000v

12. Natural Wear Resistant Rubber Sheet

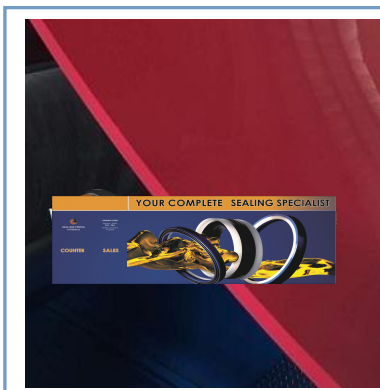

Character:	15MPA,400% 50+/-5 150mm3;		
	15mpa 60+/-5 400% 150mm3		
	14MPA 300% 60+/-5 200mm3		
Color	Black, red, green, blue, grey,		
Size	thickness	width	length
	0.5~ 50mm	<=2m	10m-25m
Material	Natural Rubber		
Hardness	50+/-5ShoreA,60+/-5shoreA		
Surface	Smooth/cloth wave		